


CONTINUOUS LINEAR PLENUM

THE CONTINUOUS LINEAR PLENUM

The Continuous Linear Plenum system is a modular kit that, once installed, creates a separate and continuous plenum zone capable of handling temperature ranges in any climate. This unique, flexible system can be customized to accommodate almost any height or width, and works extremely well with many building envelope designs and sustainable solutions.


FEATURES

- Modular kit delivers cool or warm air at the building perimeter as required
- Controlled CFM output
- Flexible in height and width to accommodate the building design
- Can be ducted or VAV-controlled with a pressurized underfloor plenum
- Designed and constructed for minimal maintenance
- Available with hydronic or electric fin heat modules
- Can be installed under access floor heights from 7" to 24"
- Clear, anodized or custom powder-coated grill colors available

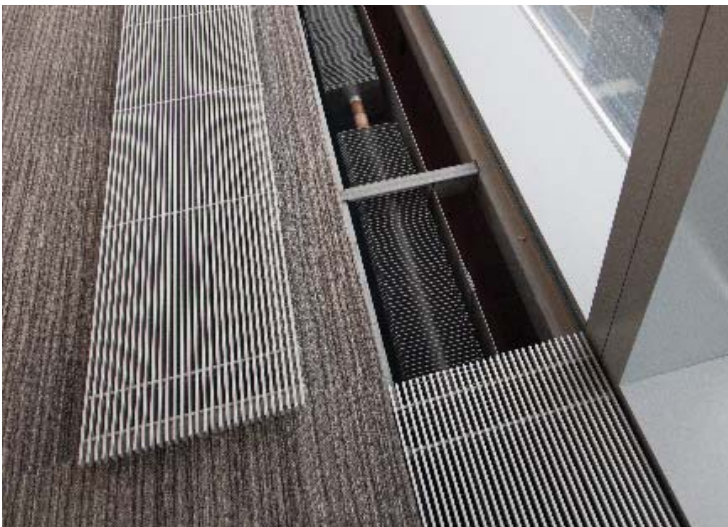

CONTINUOUS LINEAR PLENUM

CONTINUOUS LINEAR GRILL PROFILE VIEW

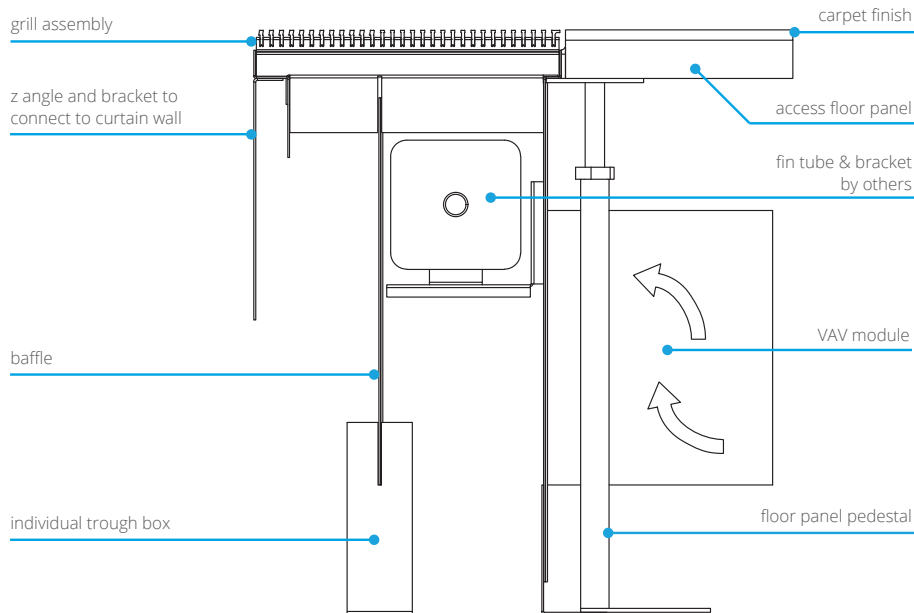


PERFORMANCE DATA

Plenum Pressure	0.05" w.g.
Air Flow *	45 CFM/linear ft
NC Level	< 30

* VAV module is installed every 48" OC and rated at 180CFM

HEATING MODULE

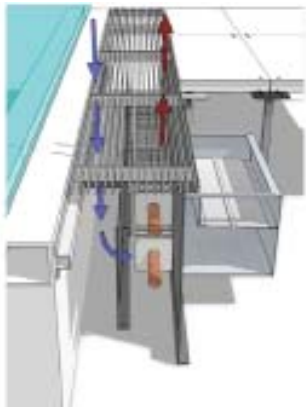

COOLING MODULE

