Global IFS®
INTEGRATED FLOORING SOLUTIONS

TAG :

FPB OPTIONS - DISCHARGE ATTENUATORS

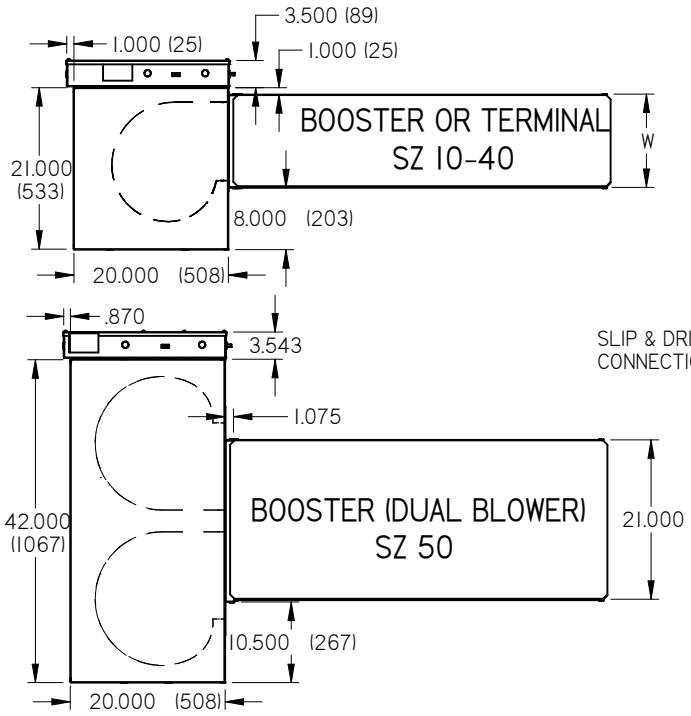

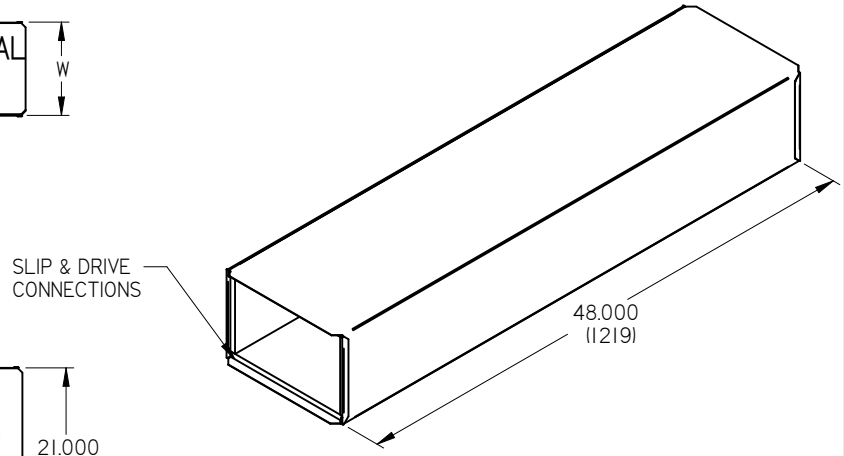

UNIT SIZE	DAS 4FT. CONFIGURATION	H	W
10	STD BOX/BOX & EC	7.500 (191)	12.000 (305)
20	STD BOX/BOX & EC	8.000 (203)	12.000 (305)
30	STD BOX/BOX & EC	10.000 (254)	12.000 (305)
40	STD BOX/BOX & EC	12.500 (318)	14.000 (356)
50	STD BOX/BOX & EC/BOX & & WC	10.000 (254)	21.000 (533)
10	BOX & WC (CWC ONLY)	5.000 (127)	21.000 (533)
10/20	BOX & WC/SZ 10-HWC ONLY	7.500 (191)	21.000 (533)
30	BOX & WC	10.000 (254)	21.000 (533)
40	BOX & WC	12.500 (318)	21.000 (533)

DAS LINER OPTIONS:
☐ DAS-FG50: 1/2" FIBERGLASS LINER
☐ DAS-FF50: 1/2" FIBER FREE LINER

NOTES:
- 22 GA. GALVANIZED STEEL HOUSING
- MECHANICALLY SEALED, LEAK RESISTANT
- DISCHARGE ATTENUATORS ARE SHIPPED LOOSE WITH SLIP & DRIVE CLEATS WHERE REQUIRED
- STD DISCHARGE COLLARS ARE PROVIDED WITH STANDARD BOX

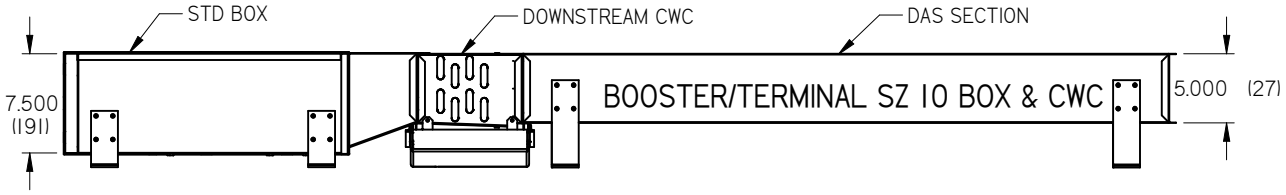

Project Name and Number:				PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF Global IFS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF Global IFS IS PROHIBITED		
Description:	**FPB - FAN POWERED BOX - DISCHARGE ATTENUATORS**					
Engineer:		**Submission Date:**		**Dwg Release:** 272832	**Sheet:** 1	**Size:** Letter

11/10/2020 REV 0