




	CORE STYLE	A	B	C
1/4" SPACING	<input type="checkbox"/> 15A	1/4 (6)	3/32 (2)	0
	<input type="checkbox"/> 16A	1/4 (6)	1/8 (3)	15
7/16" SPACING	<input type="checkbox"/> 25C	7/16 (11)	3/16 (5)	0
	<input type="checkbox"/> 26C	7/16 (11)	3/16 (5)	15
	<input type="checkbox"/> 27C	7/16 (11)	3/16 (5)	30

#### FASTENING

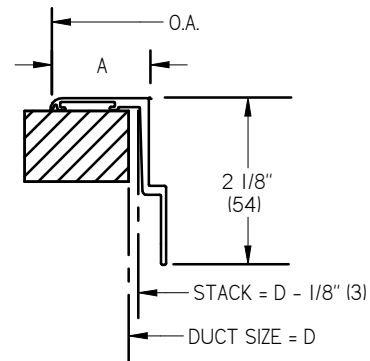

- ☐ **B - SPRING CLIP (shown)**  
(SILL ONLY)
- ☐ **A - COUNTERSUNK SCREW**  
AVAILABLE ON 1000 AND 1250 BORDER STYLES
- ☐ **H - STRAIGHT HOLES**  
AVAILABLE ON 750 BORDER STYLE
- ☐ **0 - NO HOLES**

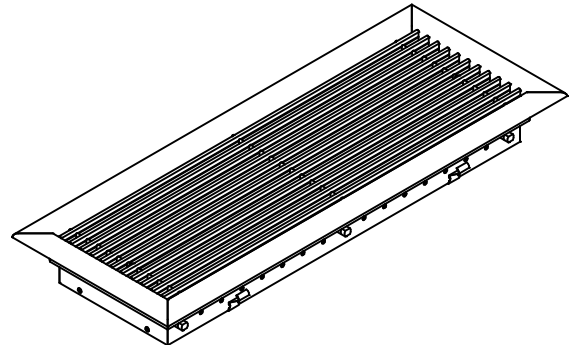

BORDER STYLE	BORDER WIDTH (A)	OVERALL (OA)
<input type="checkbox"/> 1250	1 1/4" (32)	D + 2 1/2" (54)
<input type="checkbox"/> 1000	1" (25)	D + 1 5/8" (41)
<input type="checkbox"/> 750	3/4" (19)	D + 1 1/8" (29)

#### FEATURES:

- Extruded aluminum construction with core bars parallel to long dimension
- Sections can be joined for continuous appearance using alignment splice plates
- Designed for light foot traffic floor applications
- Not designed to withstand heavy loads from equipment such as carts, forklifts, etc.
- Screw mounting holes per factory standard
- Various finish options available including anodized and custom colors
- Aluminum perforated baffle included
- For displacement bar grilles supplied as one unit:

	MIN	MAX
<b>LENGTH</b>	12 in.	72 in.
<b>WIDTH</b>	6 in.	12 in.

Project Name and Number:

 Description: **DBG - Displacement Bar Grille**

Engineer:

 Submission  
Date:

 PROPRIETARY AND CONFIDENTIAL  
 THE INFORMATION CONTAINED IN THIS  
 DRAWING IS THE SOLE PROPERTY OF  
 Global IFS. ANY REPRODUCTION IN PART  
 OR AS A WHOLE WITHOUT THE WRITTEN  
 PERMISSION OF Global IFS IS PROHIBITED

Dwg Release: 272719 Sheet: 1 Size: Letter